

## Your Guide to the SunBox® SunSation®

You have just made the important decision to buy your own SunBox® SunSation® light box. With this purchase, you join thousands of other individuals and hundreds of facilities worldwide who have chosen to use SunBox® products. Thank you for choosing The SunBox Company as your bright light source. We truly value your business.

SunBoxes are the most advanced and the highest quality bright light boxes on the market and are backed by a lifetime warranty—the longest in the industry. Founded in 1985, The SunBox® Company is the original manufacturer of high-intensity light boxes. We constantly strive for excellence and are proud of our products and service.

The SunLight SunSation® is the most compact and portable model in our line of bright light units.

### IMPORTANT NOTES:

- *In the event that your unit is damaged or broken upon delivery immediately report the problem to us by calling 800-548-3968 (toll-free) or 301-869-5980 so that the problem can be resolved in a timely fashion.*
- *Occasionally, fluorescent lamps may break or become loose in shipping. If, upon receipt, the fixture does not light, see the instructions for replacing the bulb to open the unit and confirm if the bulb is broken/needs to be reinstalled. If your bulb is broken please contact us so we can send you a replacement.*
- *Please save all packing materials for reuse, should you need to return your unit to us. The SunBox Company cannot be responsible for damage due to insufficient packing.*
- *To prevent electric shock, do not use this light in any extension cord or other outlet unless all three prongs of the plug can be inserted fully. Never remove the third (grounding) prong of this unit's plug. If you need to convert our 3-prong plug for a 2-prong outlet, make sure you properly ground the adapter to the wall plate. Otherwise, the light fixture might flicker while either on or off.*

## General Guides for Use

Most people use their SunBox light boxes as sources of bright light during the fall and winter months. Some people use them on overcast days at any time of year, or when their schedules or surroundings do not allow much exposure to natural sunlight. People working night shifts also use SunBoxes. Most people use light in the morning. If you use light too late in the day, it may disturb sleep.

To use your SunSation®, the unit should be in front of you so that the light shines onto your face and your eyes should be open. Your unit will reach full brightness within a few minutes of being turned on. It is not necessary to look directly into the light; most people read, eat, work on computers or watch TV while using their SunBox. Eyeglasses or contacts may be worn, but heavily tinted glasses will reduce the amount of light received.

Average use at the 10,000 lux distance is roughly 20-30 minutes per day. At 5,000 lux, that would be the equivalent of 40 minutes to 1 hour. At 2,500 lux, the light might be used for two to three hours. Actual time for a particular individual will vary. It usually takes some experimentation to find a routine that is right for you.

<b>To receive:</b>	<b>10,000 lux</b> your eyes must be	<b>14"</b> from the unit.
	<b>5,000 lux</b>	<b>19"</b>
	<b>2,500 lux</b>	<b>29"</b>

## Our Commitment to You

The SunBox® Company will provide you with valuable customer service, which continues well beyond your actual SunBox purchase. Your SunBox® SunSation® comes with a lifetime warranty, with a two-year guarantee on the bulb. Should a covered repair be necessary during this warranty period, be assured that your unit (or a replacement, if repair is not possible) will be shipped back to you within 48 hours of receipt of the damaged unit.


When you need to replace the bulb in your SunBox®, simply call us to conveniently have a new bulb shipped to you at a discounted price of 20% off the suggested retail price. We also carry a wide variety of lighting products to serve many of your lighting needs. Please contact us for information about our other lighting products.

You can place an order online 24 hours a day from our website—[www.sunbox.com](http://www.sunbox.com). Whenever you need to reach us, simply call us toll-free 800-548-3968 or 301-869-5980 (local number). We will return your call within 24 hours. Thank you for choosing The SunBox Company!

**The SunBox® Company • 201 Broadway St. Suite 220 • Frederick, MD 21701**  
**Toll-free Phone: 800-548-3968 • Local Phone 301-869-5980 • Fax: 301-977-2281**  
**Email: [orders@sunbox.com](mailto:orders@sunbox.com) • Website: [www.sunbox.com](http://www.sunbox.com)**

# SunBox SunSation® Bulb Replacement

1. Slip the SunBox® SunSation® off of its stand and rest it horizontally on a flat surface face down so that the six (6) screws holding the front and back halved together are facing you. Using a Phillips head screwdriver, remove the screws (a).
2. Lift off the back of the unit. Flip it over so the bulb and socket are facing you and set it down on your flat surface work area (b). Cut white shipping tie strap with scissors.
3. Slowly pull the end of the old fluorescent tube furthest from the socket outward to about a 20° angle (c) and (d).
4. Lift the old tube out of the unit and carefully dispose of it. If it has been broken, carefully clean the interior of the unit to remove any glass fragments that may have come loose.
5. Insert the new bulb into its socket, on an angle (c) and (d), the gently push the bulb backward unit it rests against the back of the unit with the clip securing it into place. The base of the bulb and the base of the socket should be flush (b).
6. Flip the back of the unit (with the new bulb in it) back over the front piece, line up the screw holes and thread the six (6) screws back into place. Tighten the screws with the screwdriver unit the front and back pieces are securely rejoined.
7. Put your SunSation® back on its stand. When you turn it on, the bulb will take a few minutes to reach full brightness.

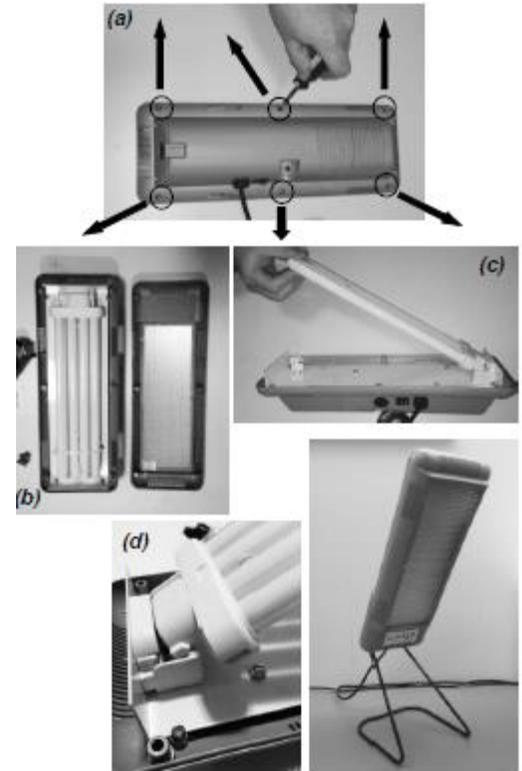

## ABOUT BULB REPLACEMENT

The fluorescent bulb in your SunBox® SunSation® is guaranteed against failure with normal use for two (2) years, and should still be functional for much longer. However, since bulbs lose intensity with use and continued use of old fluorescent bulbs can damage the ballast, we recommend that you change your bulb every 2-3 years. With your SunBox SunSation® purchase, you are entitled to a 20% discount on future purchases of the FML55 replacement bulb.

If, for any reason, you encounter problems with your light box, contact us at 800-548-3968 or 301-869-5980.

**Limited Warranty/Guarantee:** The SunBox® Company, Inc. (us, we, our) warrants to the original purchaser (you, your) that the SunBox® SunSation® (light unit, unit) is to be free from defects in material and workmanship under normal use and service for the life of the product. Our entire liability and your exclusive remedy as to the unit(s) shall be repair or replacement of the unit, at our option, when returned to us with a copy of the receipt. You shall be responsible for the cost of returning the unit to us with a copy of the receipt and we will return the unit to you at our cost. If failure of the unit has resulted from accident, abuse, or misapplication, we shall have no responsibility to replace or repair the unit. Fluorescent tubes are guaranteed for two years against failure.

The above are the only warranties of any kind, either express or implied, including but not limited to the implied warranties of merchantability and fitness for a particular purpose, that are made by The SunBox® Company on this product. No oral or written information or advice given by The SunBox® Company, its dealers, distributors, agents, or employees shall create a warranty or in any way increase the scope of this warranty. This warranty gives you specific legal rights. You may have other rights, which vary from state to state.

Specifications: 110V AC 50/60Hz .53 amps 55 watts  
Dimensions: 15" H x 5.5" L x 4" D Weight: 3.5 lbs  
Replace bulb with FML55  
Also available in 220V/50Hz

**Made in USA**

UL/CUL Listed

UL Listing # E141022